

MTW - TREKKING POWER HT (MULTITRACTION WHEELCHAIR)

Public price starting from € 5960,00

ENTER A NEW MOBILITY


M.D.R.: **2544586**

Basic UDI-DI: **805378246MTWTRP13785**

Order
Quote

Dealer
Date

Dealer's stamp



MODEL FEATURES

- High Torque 110 Nm (55x2)
- Triride Software
- Programmable and customizable electronics
- Traction selector: Front(I), Rear (II), Integral 3x3(III)with power split
- Rear LED light with stop function flashing when braking
- Weight from 10.6 Kg
- Anti-tip arm
- Wheel diameter and tyre of your choice
- Range:up to 50 km
- Maximum power 1000W
- Battery Lithium-ion 36V or 48V
- Dismountable Kit

Kit with self-supporting frame, structurally independent from the wheelchair frame. Combined with Triride motors, it allows you to have a high-performance three-wheel electric vehicle. Drive Units also individually selectable front only, rear only or all three at the same time with a power splitter between front and rear. The Trekking Power kit attaches and removes in a few seconds, returning the wheelchair to its original state without any structural changes.

Name and Surname:

Age:

E-mail:

Weight:

Pathology:

Tel.:

TREKKING POWER CONFIGURATION

Triride to match* S/N optional
 BS-C-079 Display for control unit configuration
 customization: _____ (21 character)

*free connection with your Triride including switch for traction selection (I, II, III)

Double battery with double Control Unit *

MT-LH-108	48V - 720 Wh	€ 0,00	<input type="checkbox"/>
MT-LH-107	48V - 1030 Wh	€ 580,00	<input type="checkbox"/>

Complete Wheels***

With pushrim		€190,00	Without pushrim		optional		
Wheel 24" x 1	City	€ 0,00	<input type="checkbox"/>	Wheel 20" x 2,125	City	€ 0,00	<input type="checkbox"/>
Wheel 24" x 1,75	City	€ 0,00	<input type="checkbox"/>	Wheel 20" x 2,60	Cross	€ 68,00	<input type="checkbox"/>
Wheel 24" x 2,1	City	€ 0,00	<input type="checkbox"/>	Wheel 20" x 3	City	€ 68,00	<input type="checkbox"/>
Wheel 24" x 1,75	Cross	€ 0,00	<input type="checkbox"/>	Wheel 20" x 4	Road Fat	€ 98,00	<input type="checkbox"/>
Wheel 24 x 1,95	Cross	€ 84,00	<input type="checkbox"/>	Wheel 20" x 4	Cross Fat	€ 98,00	<input type="checkbox"/>

***Depending on availability

ACCESSORIES / OPTIONAL

MT-LH-110	Bluetooth kit for MTW/Triride	€ 120,00	<input type="checkbox"/>
MT-LH-111	Joystick complete with standard support	€ 280,00	<input type="checkbox"/>
MT-LH-112	Adjustable and swiveling joystick support	€ 125,00	<input type="checkbox"/>
MT-LH-114	Preparation for tow hook	€ 75,00	<input type="checkbox"/>

In addition to the standard configurations described, the device is designed to customize driving controls depending on the needs of the individual user. Please ask for quotation by contacting the company

N.B. For Particular adaptations, modifications or dedicated work on the wheelchair, a surcharge may be applied and will be communicated in a quote (after the compatibility is confirmed)

The Company reserves the exclusive right to bring changes, without notice, if it deems it useful for the improvement of the Product.

Note:

MTW FRAME (MTW= MULTITRACTION WHEELCHAIR)

Public price starting from € 3.200,00

ENTER TO A NEW MOBILITY

M.D.R.: **2544579**

UDI-DI di base: **805378246FRWHL1207F**

Order Dealer
Quote Date

Dealer's stamp




FRAME FEATURES

- Frame in choice of aluminum/ergal or stainless steel
- Ultra-light, compact custom frame, same size as an "open frame" but with a quadrilateral structure for maximum stiffening
- Semi-integrated front attachments with no front bulk
- Designed for different wheel diameters (from 16 to 26)
- Variable backrest inclination
- Seat in double reinforced washable nylon
- Fabrics/nylon for backrest and seat in hypoallergenic and breathable material *
- Kit can be dismantled for easy transport in the car
- Anti-tip wheel

** Postural cushions and backrests not supplied*

Note:

FRAME CONFIGURATION

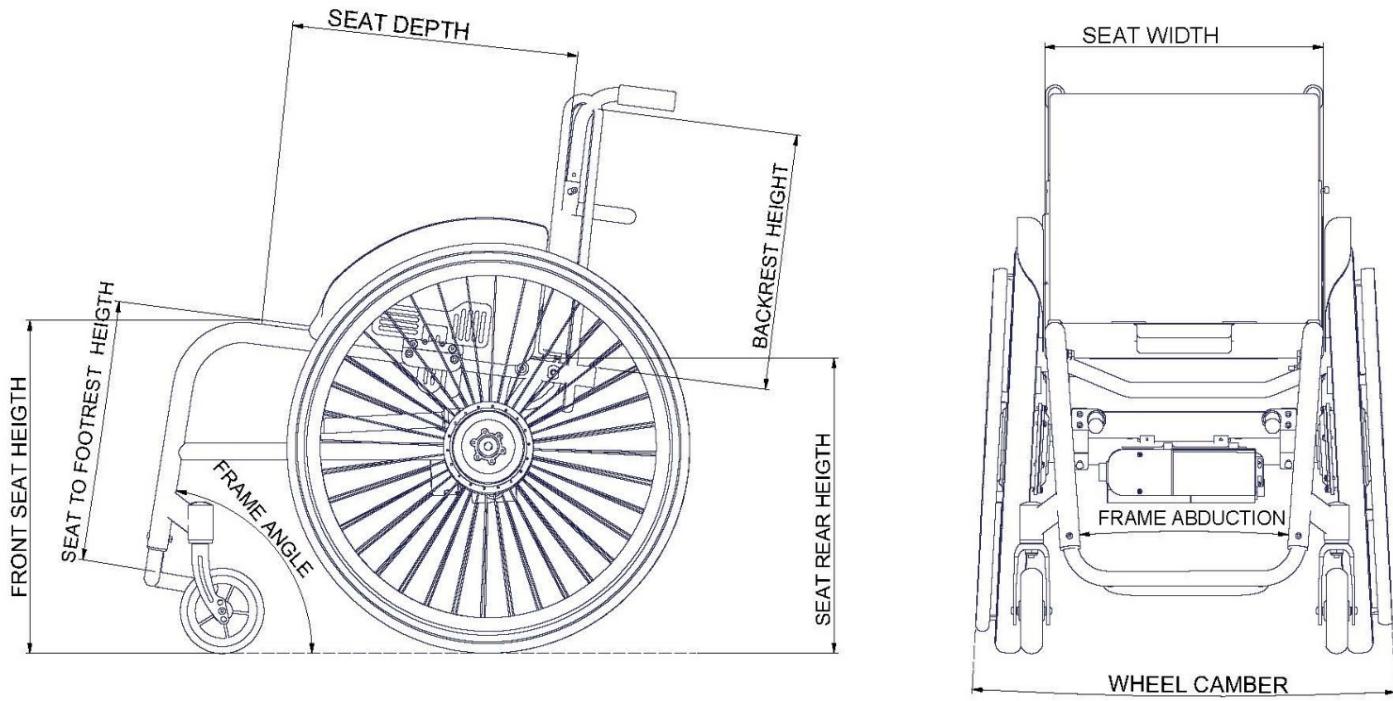

Seat Width	34	36	38	40	42	44	46
Seat Depth		38	40	42	44	46	46
Opening angle of front tubes			90	85	80	75	
Frame Abduction (front tubes)				0	3	5	5
Front wheels (fixed)			3	4	5	6	
Wheel camber degrees					0	3	
Backrest height from 200 - 480						mm	
Platform Height from 350 - 490 (from platform to seat canvas)						mm	
Front seat canvas height from ground HA 400 to 520						mm	
Rear seat height from ground HP 400 to 500						mm	

Reinforced frame tailored for users above 125 Kg

Note: